

Temperaturregler bei Spindelstellung Anschlag links gezeichnet/
Thermostat drawn in minimum position


Genehmigte technische Daten/Approved technical datas
55.13000.000, Bl.901

Bemerkungen/Notes:


Normalklima/Standard atmosphere DIN EN 60068-1 (23±2)°C
Temperaturen sind AUS-Werte/Temperatures are OFF values
Schaltdifferenz/Differential: (4±2)K
(im Werksnormbad/in E.G.O. standard bath)
Min. Fühlertemperatur/Min. sensor temperature: -10°C (DC)
Max. Fühlertemperatur/Max. sensor temperature: 250°C
(aus Sicherheitsgründen/for security reasons)
Max. Gehäusetemperatur/Max. housing temperature: 150°C
Min. Biegeradius Kapillarrohr/
Min. bending radius of capillary tube: 5 mm
Kunden-Zeichnungs-Nr./Customer drawing-No.:

Korrekturfaktor/correction factor: c = 0,38 [K/K]
(bez. auf Umgebungtemp./based on ambient temperature)

Schaltschema/
Wiring diagram



Temperaturwerte/
Temperature values

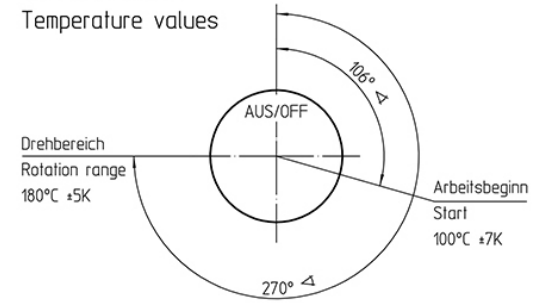

.		This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.		Blank No. EN Mat.No.		Scale Unit	
.		Material		Scale	
.		Surface Texture ISO 1302		⚙	
.		General Tolerances ISO 2768-v		⚙	
.		Designation		
1 CD0001		2010-12-15		Create, 2002-11-08		POSOVSKY	
Cha. Information No.		Date		Proc.		2002-11-08	
F.Rel. E01235		2002-11-08		Rel.		2002-11-11	
.		SCHUHMAN		
.		Drawing No.		Sh.No. Ver. Stat. Sheets Doc. Ex.Doc.	
.		55.13039.210		901 0 F 1	
.		Repl.for		Reference RM	
.		Repl.by	

