


工作方式: S1
 绝缘等级: B、F
 防护等级: IP44、IP54
 环境温度: -30°C ~ 60°C
 认证: CCC、CE、UL
 能效指标: 符合ErP2015

Mode of operation: S1
 Insulation class: B、F
 Type of protection: IP44、IP54
 Ambient temperature: -30°C ~ 60°C
 Certificates: CCC、CE、UL
 Target energy efficiency: ErP2015

风量曲线

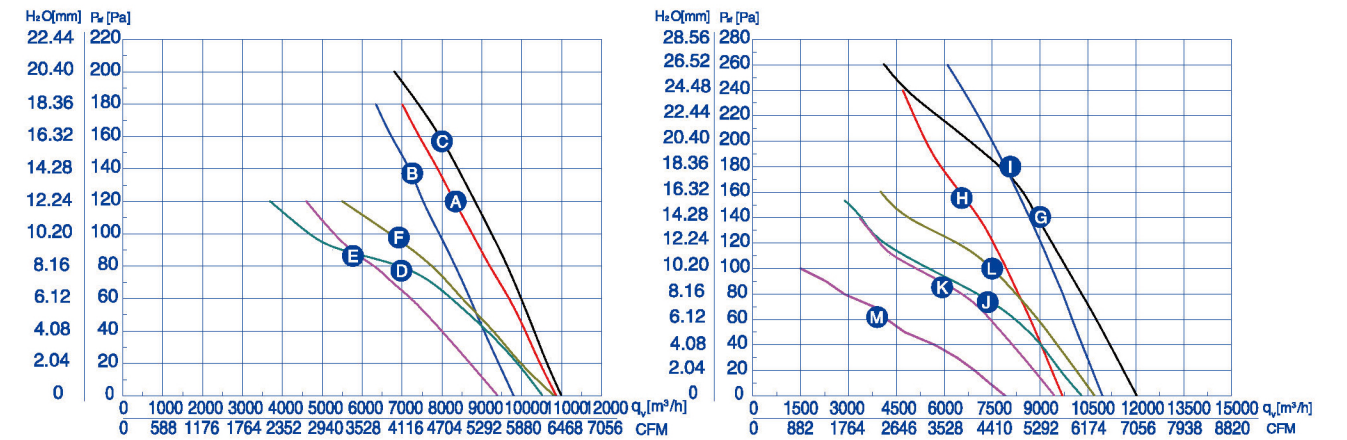

技术参数

型号	额定电压	频率	额定电流	输入功率	额定转速	电容	噪音	叶片数	净重	曲线	备注					
TYPE	V	Hz	A	W	r/min	μF	dBA	BLADE	kg	CURVE NO.	NOTE.					
YWF4E-630S-137/70	220	50	3.50	750	1360	16	75	5	15.0	A						
	220	50	3.20	700	1380	20	75	5	15.0	B						
		60	4.40	1050	1530		77			C						
YWF6E-630S-137/70	220	50	2.70	550	900	12	71	5	15.0	D						
		50	2.40	480	920		12			71	5	15.0	E			
			60	2.60	570					1100	72	F				
YWF4D-630S-137/70	380	50	1.60	800	1320	/	75	5	15.0	G						
			50	1.62	550					1380	/	75	5	15.0	H	
				60	1.53					865		1585			77	I
YWF6D-630S-137/70	380	50	1.45	550	900	/	71	5	15.0	J						
			50	1.35	400					920	/	71	5	15.0	K	
				60	1.20					560					1100	72
YWF8D-630S-137/50	380	50	0.60	220	670	/	58	5	14.5	M	*58					