


EBOX K02-108-250 LG-S1N

Air Cooled Condensers

Heat Exchanger Technical Specifications



Model: EBOX K02-108-250 LG-S1N

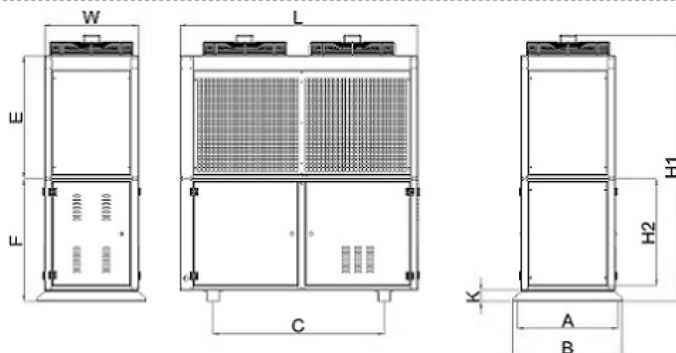

Dimensions

C :	1106 mm	W :	610 mm	B :	705 mm	H2 :	690 mm	L :	1535 mm
H1 :	1722 mm	F :	792 mm	E :	793 mm	B1 :	0 mm	A :	655 mm
K :	72 mm	Y :	0 mm	ØDin :	2 x 22 [7/8"]	ØDout :	2 x 19 [3/4"]	Wg :	133 kg

Capacity Information

Capacity	63,290.24 Watt	Heat Transfer Area	102.76 m ²
Air T-inlet-RH / T-outlet-RH	25 °C-50 % / 37.69 °C - 24.09 %	Tube Volume	10.06 dm ³
Condensation Temperature / ΔT	40.00 °C / 15 K	Fin Spacing	2.1 mm
Sub Cooling / Gaz Sıcaklığı	1 K / 70 °C	Test Pressure	53 bar
Refrigerant	R404A (Dew) (GPW: 3922)	Max. Operating Pressure	35 bar
Fluid Flow / Pressure Drop	704 kg/h / 65.39 kPa	Energy Efficiency Class (3)	D
Altitude	0 m	Pad Fluid Group	2
		Pad Category	Gas-II

Fan Specifications (ROSENBERG)

Airflow Rate	14,907.25 m ³ /h	Air Throw (Std./Strm.&Diff.) [Ref:0,25 m/s]	- m
Fan Diameter / Motor Type	ø 500 mm / AC	Sound Power Level (LWA)	83 dBA
Number of Fans	2 Pcs	Sound Pressure Level (LPA)(2)	51 dBA
Total Fan Power	1.4 kW	Distance	10 m
Total Fan Current	6.4 A	Insulation Class	A
Voltage / Frequency / Phase	230 V / 50 Hz / 1 Phase	Protection Class	IP54
Fan Speed	1245 d/d	Temperature Range	55 °C

Notes

- 1) Capacity Correction For Altitude is According To Engineering Calculations.
- 2) Sound Pressure Calculation Standard: En13487
- 3) Energy Efficiency Class Calculation Standards: En327 Standard. Standard Conditions: Tair Inlet=25 °C, Tcond.= 40 °C, R404A, P= 1,01325 Bar.
- 4) TWATT product selection program is a Thermoway thermal device software. The data and images used belong to TWATT. The unauthorized use of data and images is prohibited. TWATT reserves the right to change all size and capacity values without prior notice.
- 5) For high pressure refrigerants such as R410A, please contact us to check maximum working pressure.