


工作方式: S1
 绝缘等级: B、F
 防护等级: IP44、IP54
 环境温度: -30°C ~ 60°C
 认证: CCC、CE、UL
 能效指标: 符合ErP2015
 Mode of operation: S1
 Insulation class: B、F
 Type of protection: IP44、IP54
 Ambient temperature: -30°C ~ 60°C
 Certificates: CCC、CE、UL
 Target energy efficiency: ErP2015

■ 风量曲线

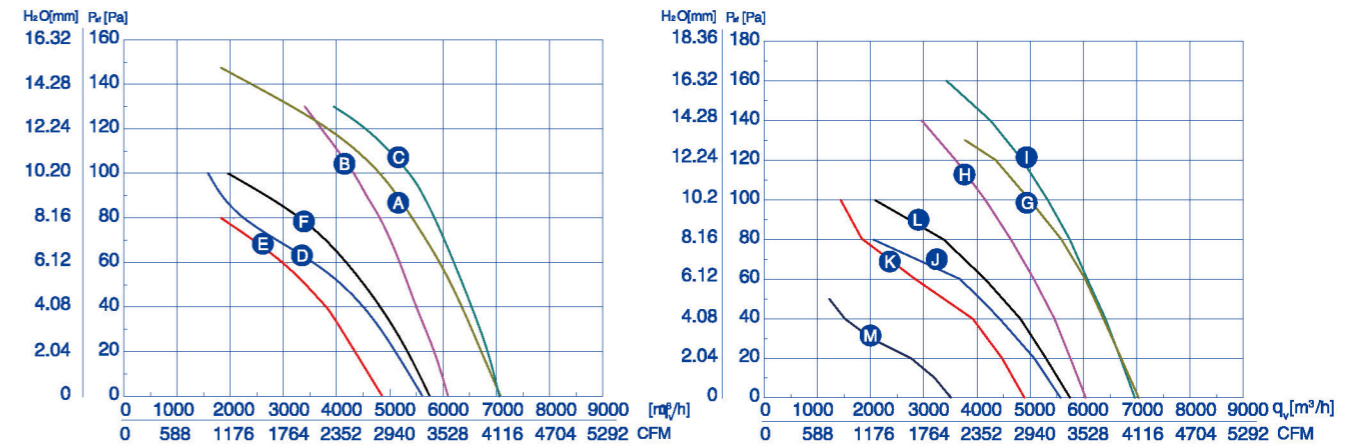

■ 技术参数

型号 TYPE	额定电压 VOLTAGE V	频率 FREQUENCY Hz	额定电流 CURRENT A	输入功率 INPUT W	额定转速 SPEED r/min	电容 CAPACITANCE μF	噪音 NOISE dBA	叶片数 BLADE	净重 NET WEIGHT kg	曲线 CURVE NO.	备注 NOTE.
YWF4E-500S-137/35	220	50	1.75	380	1320	10	71	5	9.0	A	
			1.35	295	1380	70	5	9.0	B		
			2.10	450	1580	72	5	9.0	C		
YWF6E-500S-137/35	220	50	1.05	230	900	10	66	5	9.0	D	
			1.00	200	915	65	5	9.0	E		
			1.20	260	1050	67	5	9.0	F		
YWF4D-500S-137/35	380	50	0.85	414	1300	/	71	5	9.0	G	
			0.68	275	1380	70	5	9.0	H		
			0.75	395	1550	72	5	9.0	I		
YWF6D-500S-137/35	380	50	0.54	210	900	/	66	5	9.0	J	
			0.45	150	920	65	5	9.0	K		
			0.48	210	1050	67	5	9.0	L		
YWF8D-500S-137/35	380	50	0.47	130	700	/	54	5	9.0	M	